
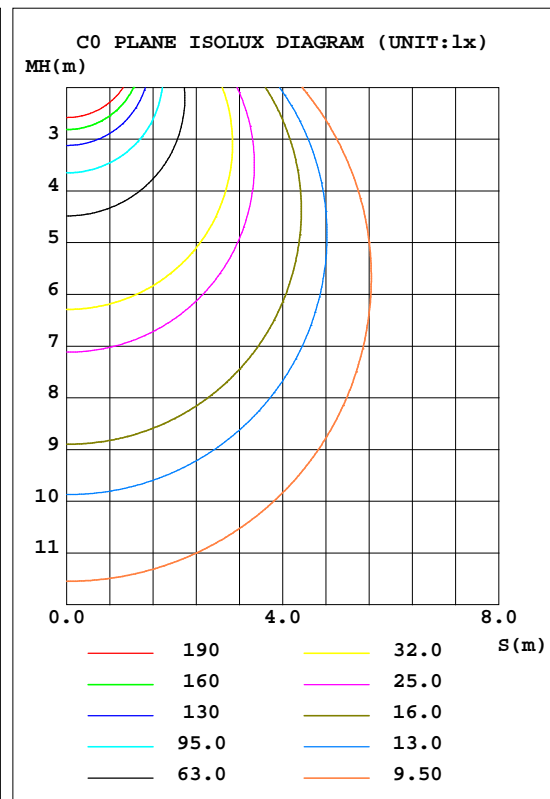


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.03 lm/W			
LED MODEL	LED-1.2M-40W-230V-6500K PF0.9	I <sub>max</sub> (cd)	1266	S/MH(C0/180)	1.25
NOMINAL POWER(W)	40	LOR(%)	104.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	4160.4	η UP, DN(C0-180)	5.5, 46.0
NOMINAL FLUX(lm)	4000	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	5.5, 47.0
LAMPS INSIDE	1	η up(%)	11.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.9	η down(%)	93.0	CIBSE SHR MAX	1.35

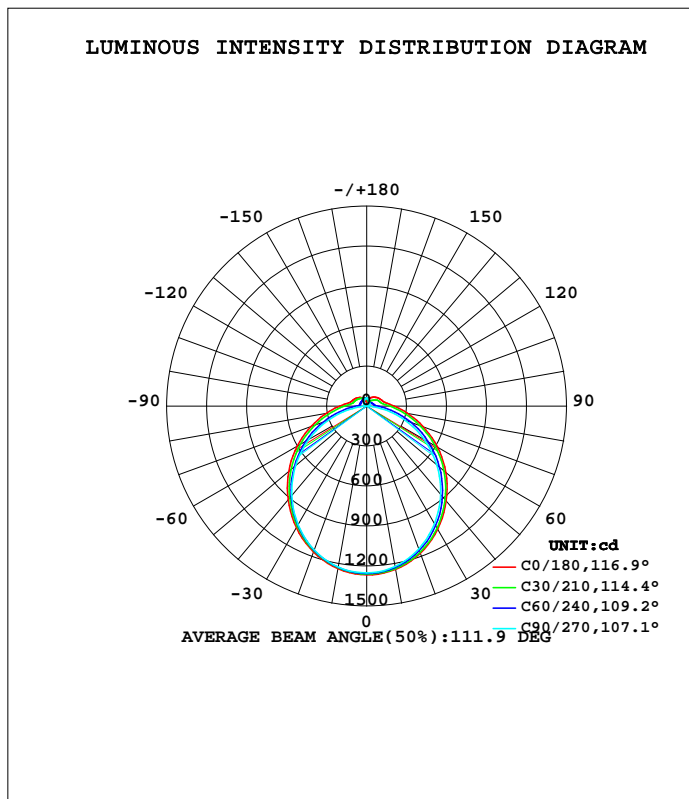

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: ZZX  
 Test Date: 2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity: 65.0%  
 Test Distance: 5.700m [K=1.0000]  
 Remarks: LN 75451240 一体全塑料三防灯

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	\$lum,lamp
10	1244	1234	1223	1210	1239	1231	1227	1230	0- 10	118.5	118.5	2.85,2.96
20	1176	1162	1143	1128	1166	1155	1150	1165	10- 20	337.7	456.2	11,11.4
30	1067	1047	1019	1007	1054	1038	1029	1056	20- 30	507.2	963.5	23.2,24.1
40	928.3	899.8	863.9	857.5	916.2	890.6	874.1	914.3	30- 40	605.9	1569	37.7,39.2
50	776.2	735.7	687.8	693.6	764.3	726.0	696.7	751.9	40- 50	626.6	2196	52.8,54.9
60	612.6	561.6	498.3	521.9	602.6	551.2	503.4	577.1	50- 60	573.8	2770	66.6,69.2
70	449.7	387.3	301.2	351.6	443.3	377.0	302.4	400.7	60- 70	460.5	3230	77.6,80.8
80	310.6	231.8	111.3	203.8	305.7	223.4	110.7	240.7	70- 80	312.4	3543	85.2,88.6
90	208.2	129.7	1.864	111.4	203.6	123.5	1.668	132.7	80- 90	177.1	3720	89.4,93
100	147.9	88.92	6.154	79.21	141.3	85.52	6.073	79.04	90-100	104.2	3824	91.9,95.6
110	124.2	78.68	12.69	72.97	118.2	77.56	13.52	76.15	100-110	80.45	3904	93.8,97.6
120	113.0	69.20	19.38	69.35	107.5	73.54	21.16	67.57	110-120	70.37	3975	95.5,99.4
130	101.4	55.32	25.23	65.52	96.57	69.39	28.00	55.85	120-130	58.40	4033	96.9,101
140	89.12	45.75	29.98	62.70	85.21	64.47	33.97	48.84	130-140	45.99	4079	98,102
150	75.92	42.20	39.67	60.94	73.60	63.56	43.39	45.94	140-150	34.98	4114	98.9,103
160	65.09	44.19	50.01	61.49	64.43	63.74	51.73	46.60	150-160	25.29	4139	99.5,103
170	58.10	51.27	57.40	59.82	36.16	61.60	58.16	53.01	160-170	15.77	4155	99.9,104
180	33.95	59.70	62.01	58.77	34.15	59.67	61.84	58.80	170-180	5.243	4160	100,104
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.21	1.21	1.21	1.17	1.17	1.17	1.09	1.09	1.09	1.02	1.02	1.02	.96	.96	.96	.93
1.0	1.04	.99	.95	1.00	.96	.92	.94	.90	.87	.88	.85	.83	.83	.80	.78	.75
2.0	.90	.83	.76	.87	.80	.75	.82	.76	.71	.77	.72	.68	.72	.68	.65	.62
3.0	.79	.70	.63	.76	.68	.62	.72	.65	.59	.67	.62	.57	.63	.59	.55	.52
4.0	.70	.60	.53	.68	.59	.52	.63	.56	.50	.60	.54	.48	.56	.51	.47	.44
5.0	.62	.53	.46	.60	.51	.45	.57	.49	.43	.54	.47	.42	.51	.45	.40	.38
6.0	.56	.46	.40	.54	.45	.39	.51	.44	.38	.48	.42	.37	.46	.40	.36	.33
7.0	.51	.41	.35	.49	.41	.34	.47	.39	.33	.44	.37	.32	.42	.36	.32	.29
8.0	.46	.37	.31	.45	.37	.31	.43	.35	.30	.40	.34	.29	.38	.33	.28	.26
9.0	.42	.34	.28	.41	.33	.28	.39	.32	.27	.37	.31	.26	.36	.30	.25	.23
10.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.35	.28	.24	.33	.27	.23	.21

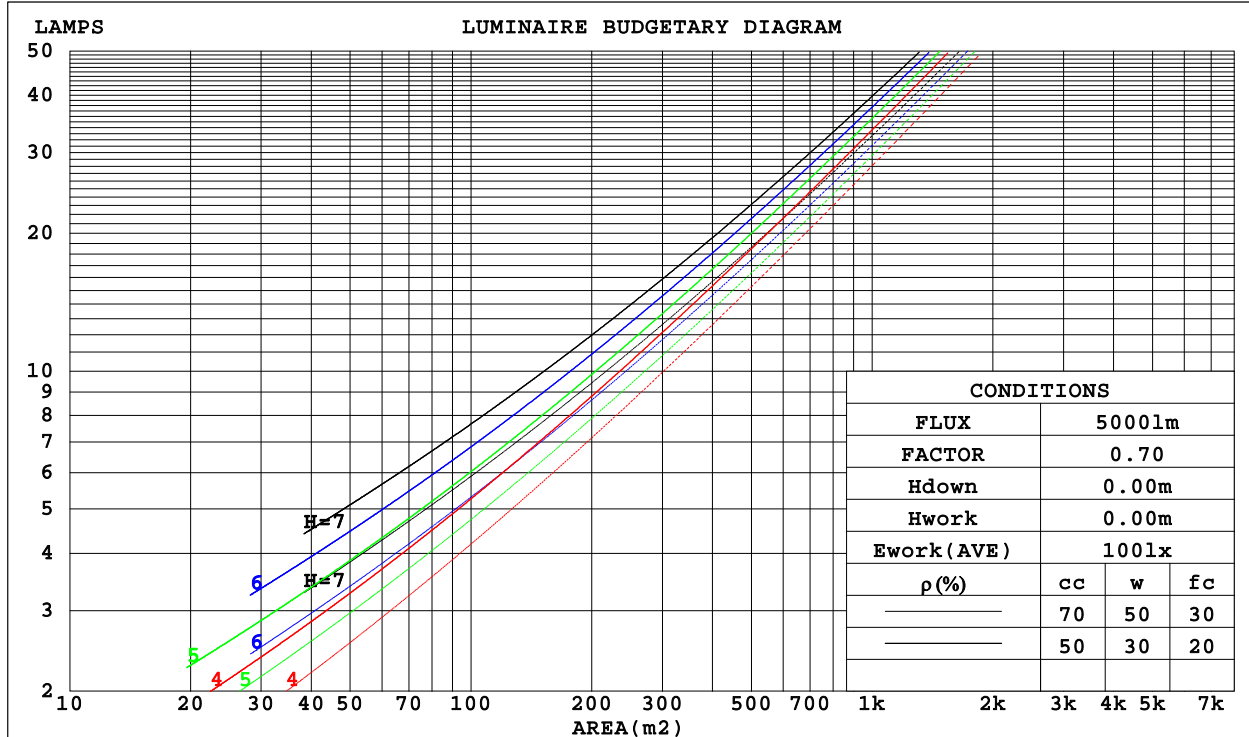

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZZX  
Test Date:2017-04-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
Humidity:65.0%  
Test Distance:5.700m [K=1.0000]  
Remarks: LN 75451240一体全塑料三防灯

WEC AND CCEC

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.350	.199	.063	.340	.194	.062	.319	.183	.059	.301	.174	.056	.284	.165	.053	
2.0	.317	.174	.053	.307	.169	.052	.289	.161	.050	.272	.153	.048	.257	.145	.046	
3.0	.288	.153	.046	.279	.149	.045	.263	.142	.043	.248	.136	.042	.234	.129	.040	
4.0	.263	.137	.040	.255	.133	.039	.240	.127	.038	.227	.122	.037	.214	.116	.035	
5.0	.241	.123	.036	.234	.120	.035	.221	.115	.034	.209	.110	.033	.197	.105	.032	
6.0	.223	.112	.032	.216	.109	.031	.204	.105	.030	.193	.100	.030	.183	.096	.029	
7.0	.207	.102	.029	.201	.100	.029	.190	.096	.028	.180	.092	.027	.170	.088	.026	
8.0	.193	.094	.026	.187	.092	.026	.177	.089	.025	.168	.085	.025	.159	.082	.024	
9.0	.180	.087	.024	.175	.085	.024	.166	.082	.023	.158	.079	.023	.150	.076	.022	
10.0	.169	.081	.023	.165	.080	.022	.156	.077	.022	.148	.074	.021	.141	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.282	.282	.282	.241	.241	.241	.165	.165	.165	.095	.095	.095	.030	.030	.030	
1.0	.274	.247	.222	.235	.212	.191	.160	.146	.132	.092	.084	.077	.030	.027	.025	
2.0	.266	.222	.186	.228	.191	.160	.156	.132	.112	.090	.077	.066	.029	.025	.021	
3.0	.258	.205	.162	.221	.176	.140	.152	.123	.098	.088	.072	.058	.028	.023	.019	
4.0	.250	.191	.146	.215	.165	.127	.148	.115	.089	.085	.067	.053	.027	.022	.017	
5.0	.242	.181	.135	.208	.156	.118	.143	.109	.083	.083	.064	.049	.027	.021	.016	
6.0	.235	.172	.127	.202	.149	.111	.139	.104	.078	.081	.061	.047	.026	.020	.015	
7.0	.228	.165	.121	.196	.143	.106	.135	.100	.075	.079	.059	.045	.025	.019	.015	
8.0	.221	.159	.117	.190	.138	.102	.132	.097	.072	.077	.057	.043	.025	.019	.014	
9.0	.215	.154	.113	.185	.134	.099	.128	.094	.070	.075	.056	.042	.024	.018	.014	
10.0	.209	.150	.111	.180	.130	.097	.125	.092	.069	.073	.054	.041	.024	.018	.014	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯

Uncorrected UGR Table

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm										
NAME: LED-1.2M-40W-230V-6500K PF0.9					TYPE:			WEIGHT:		
DIM.:					SPEC.:			SERIAL No.:1		
MFR.: LN					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.0	22.4	21.4	22.8	23.2	20.2	21.6	20.6	22.0	22.4
3H	23.0	24.3	23.4	24.7	25.1	21.6	22.9	22.1	23.4	23.8
4H	24.0	25.2	24.4	25.6	26.1	22.2	23.4	22.7	23.9	24.3
6H	25.0	26.2	25.5	26.6	27.1	22.5	23.7	23.0	24.2	24.6
8H	25.6	26.7	26.1	27.2	27.7	22.6	23.7	23.1	24.2	24.7
12H	26.2	27.3	26.7	27.8	28.3	22.6	23.7	23.1	24.2	24.7
4H 2H	21.6	22.8	22.0	23.2	23.7	20.9	22.2	21.4	22.6	23.1
3H	23.7	24.8	24.2	25.3	25.8	22.6	23.7	23.1	24.1	24.7
4H	24.9	25.9	25.4	26.4	26.9	23.3	24.3	23.8	24.8	25.3
6H	26.1	27.0	26.7	27.5	28.1	23.8	24.7	24.3	25.2	25.8
8H	26.8	27.6	27.4	28.2	28.8	23.9	24.7	24.5	25.3	25.9
12H	27.6	28.4	28.2	28.9	29.6	24.0	24.7	24.6	25.3	25.9
8H 4H	25.2	26.0	25.7	26.5	27.1	23.8	24.6	24.4	25.2	25.8
6H	26.7	27.4	27.3	27.9	28.6	24.5	25.2	25.1	25.8	26.4
8H	27.6	28.2	28.2	28.8	29.4	24.8	25.4	25.4	26.0	26.7
12H	28.6	29.1	29.2	29.7	30.4	25.0	25.5	25.6	26.2	26.9
12H 4H	25.2	25.9	25.8	26.5	27.1	23.9	24.7	24.5	25.2	25.9
6H	26.8	27.4	27.4	28.0	28.6	24.8	25.4	25.4	26.0	26.7
8H	27.7	28.3	28.4	28.9	29.6	25.2	25.7	25.8	26.3	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.4				

CIE Pub.117 Corrected 4000 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.8)

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯

UTILIZATION FACTORS TABLE

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	55	43	36	54	43	36	53	42	35	28
0.80	65	53	45	64	52	45	61	51	44	36
1.00	74	62	54	72	61	53	69	61	52	44
1.25	81	69	61	79	68	61	75	66	59	50
1.50	86	75	67	84	74	66	79	71	64	55
2.00	93	83	76	91	82	75	86	78	72	62
2.50	98	89	81	95	86	80	89	82	77	66
3.00	101	93	87	98	91	85	92	86	81	70
4.00	106	99	93	102	96	91	96	91	87	74
5.00	108	103	98	105	100	95	98	94	90	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯

**ISOCANDELA DIAGRAM**

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

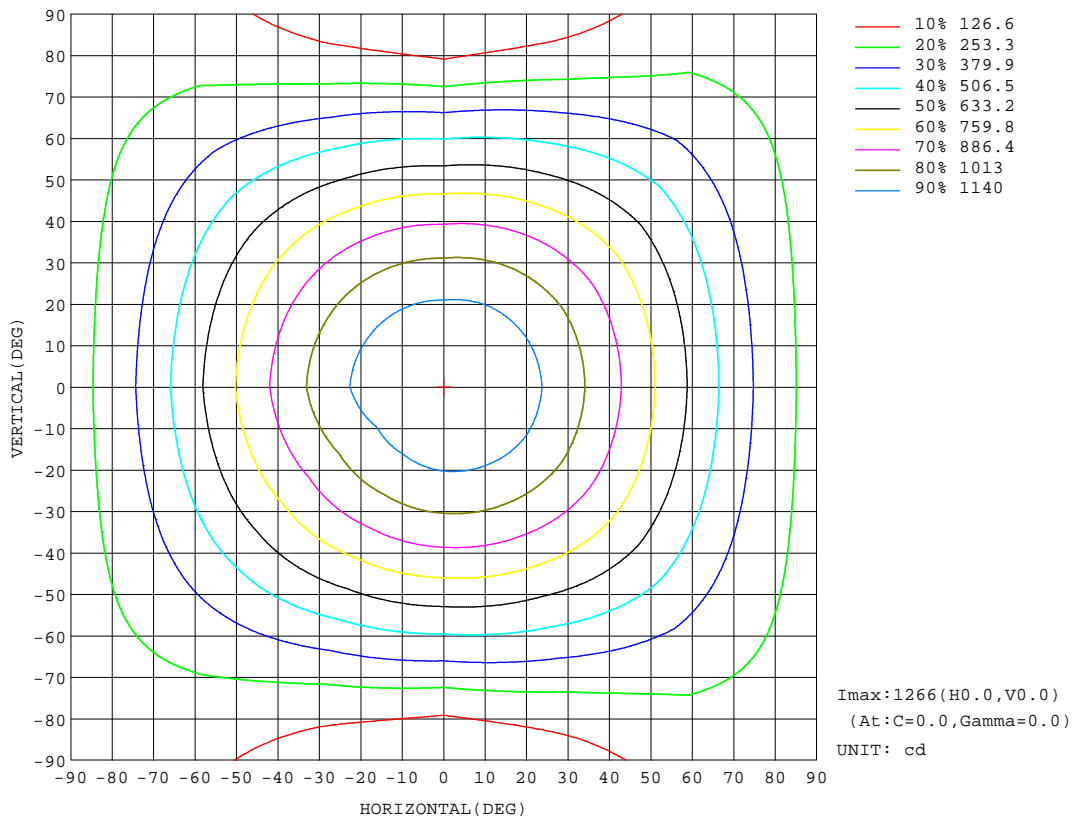


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯

**AAI Figure**

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

Flux out:2436 lm

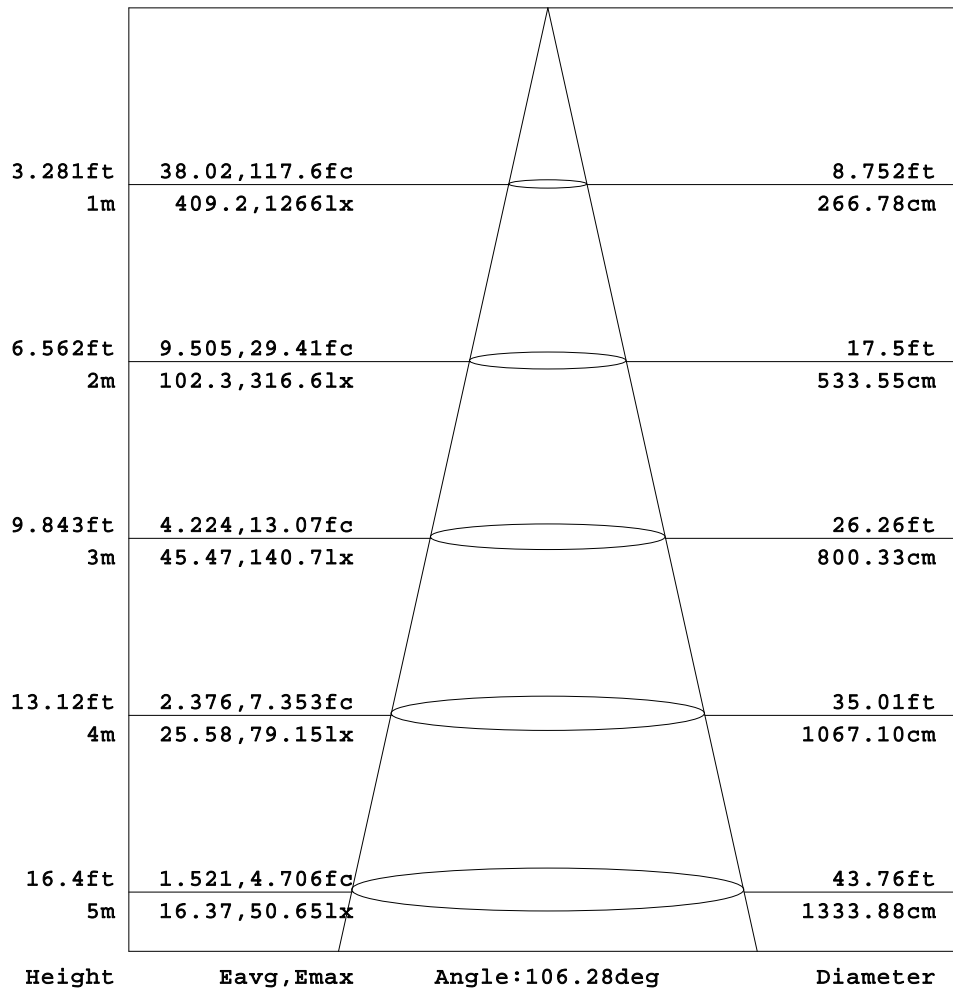

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯



ISOLUX DIAGRAM


Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

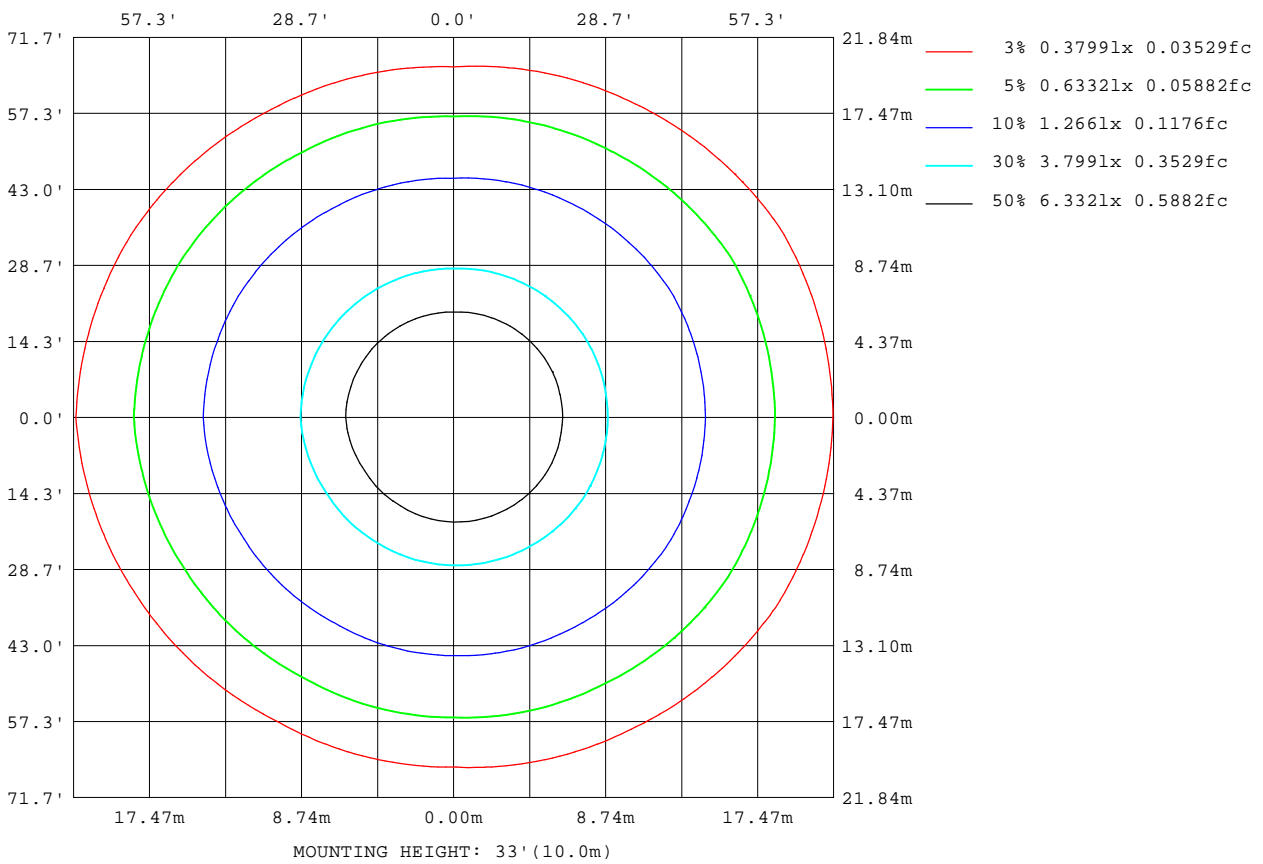

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: ZZK  
 Test Date: 2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity: 65.0%  
 Test Distance: 5.700m [K=1.0000]  
 Remarks: LN 75451240 一体全塑料三防灯

Planar Illuminance Curve

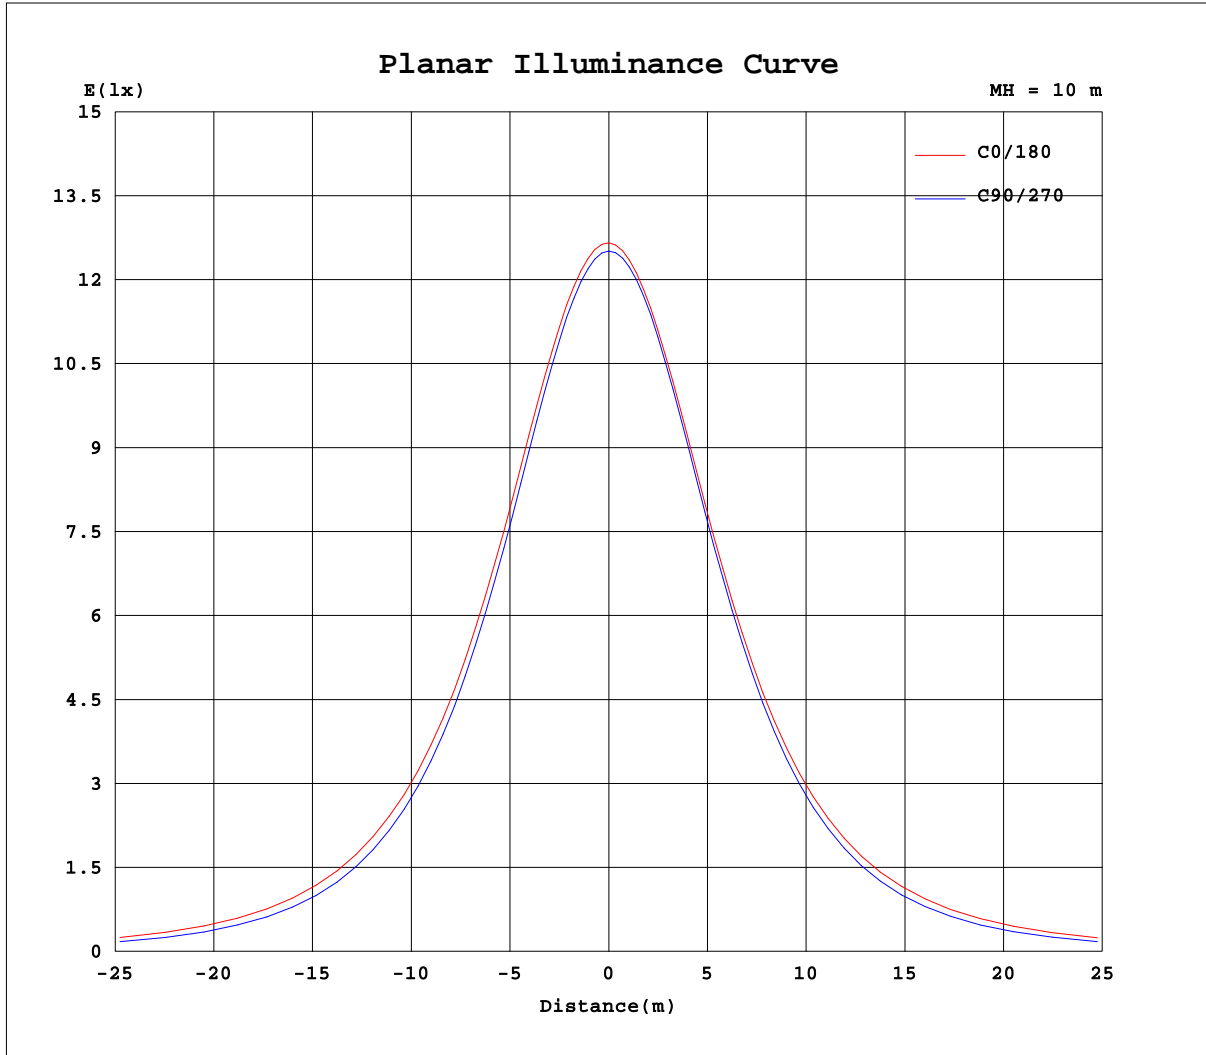

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: ZZK  
 Test Date: 2017-04-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity: 65.0%  
 Test Distance: 5.700m [K=1.0000]  
 Remarks: LN 75451240 一体全塑料三防灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.8V I:0.1871A P:39.24W PF:0.9087 Lamp Flux:4000x1 lm		
NAME: LED-1.2M-40W-230V-6500K PF0.9	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:1
MFR.: LN	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1266	1260	1256	1252	1247	1244	1266	1260	1256	1252	1247	1244						
5	1263	1258	1252	1246	1239	1236	1261	1255	1252	1248	1247	1245						
10	1244	1239	1230	1223	1212	1209	1239	1233	1229	1227	1230	1230						
15	1222	1216	1205	1196	1184	1181	1215	1208	1204	1202	1208	1211						
20	1176	1169	1154	1143	1129	1128	1166	1157	1152	1150	1161	1168						
25	1137	1129	1111	1098	1083	1084	1125	1115	1109	1106	1121	1131						
30	1067	1057	1036	1019	1005	1009	1054	1042	1033	1029	1049	1063						
35	1014	1004	979	961	947	953	1001	988	976	970	993	1012						
40	928	915	884	864	851	864	916	899	882	874	902	927						
45	869	854	818	795	785	802	857	837	815	805	836	866						
50	776	758	713	688	680	707	764	742	710	697	732	772						
55	711	692	641	613	608	642	700	676	638	621	659	707						
60	613	591	532	498	501	543	603	575	527	503	548	606						
65	546	524	460	420	428	478	538	508	454	424	474	539						
70	450	424	351	301	322	382	443	410	345	302	364	438						
75	390	361	281	223	253	323	384	348	274	222	292	374						
80	311	278	186	111	163	245	306	267	180	111	193	288						
85	265	231	135	50.1	116	202	260	221	129	48.2	138	240						
90	208	175	84.2	1.86	70.3	153	204	167	80.0	1.67	84.4	181						
95	179	148	66.1	2.79	56.8	128	174	141	63.4	2.62	62.8	144						
100	148	120	57.5	6.15	51.5	107	141	115	55.7	6.07	53.9	104						
105	135	111	56.8	8.65	50.9	100	129	107	54.9	8.93	52.5	100						
110	124	104	53.4	12.7	50.7	95.3	118	101	54.4	13.5	51.8	101						
115	120	99.9	48.3	15.4	50.7	92.3	114	97.5	54.3	16.6	48.5	98.1						
120	113	94.2	44.2	19.4	50.8	87.9	107	92.9	54.2	21.2	45.8	89.4						
125	108	83.9	41.8	21.9	50.9	84.9	103	89.7	54.1	24.0	43.6	81.0						
130	101	71.3	39.3	25.2	50.8	80.2	96.6	84.9	53.9	28.0	40.9	70.8						
135	96.5	64.1	37.9	27.2	50.6	77.1	92.1	81.6	53.7	30.5	39.7	66.7						
140	89.1	55.5	36.0	30.0	53.1	72.3	85.2	75.9	53.1	34.0	38.2	59.5						
145	84.1	50.9	34.8	33.0	56.5	69.1	80.5	72.4	57.1	37.7	37.4	55.0						
150	75.9	44.8	39.6	39.7	57.7	64.2	73.6	67.3	59.9	43.4	43.1	48.8						
155	71.1	41.1	43.2	44.0	58.1	63.4	69.0	63.9	60.5	46.9	46.3	45.0						
160	65.1	39.8	48.6	50.0	57.7	65.3	64.4	67.5	60.0	51.7	50.7	42.5						
165	63.6	40.0	52.0	53.3	58.3	63.5	61.6	65.7	60.1	54.5	53.5	45.1						
170	58.1	46.4	56.2	57.4	59.2	60.4	36.2	62.5	60.7	58.2	56.7	49.3						
175	38.5	51.4	58.4	59.6	59.7	58.9	34.4	60.5	60.9	60.1	58.8	52.0						
180	34.0	58.1	61.3	62.0	60.9	56.6	34.2	57.9	61.5	61.8	61.0	56.6						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZZX  
 Test Date:2017-04-19

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.267  
 Humidity:65.0%  
 Test Distance:5.700m [K=1.0000]  
 Remarks: LN 75451240一体全塑料三防灯